

TD – 80961 D/E

FL-AHB-KAU-520-DeW

Flächenreiniger Air mit Kaugummientferner / Air Surface Cleaner with gum remover

Technische Daten

Druck	350bar (35MPa)
Temperatur	120°C
Drehzahl	max. 2000 U/min
Gehäuse	ø520
Wasseranschluss	G3/8"F
Düsenanschluss	2x 1/8"NPT-F
Durchflussmedium	Wasser (pH 3-12)

Technical Data

Pressure	350bar (35Mpa)
Temperature	120°C
RPM	max. 2000 rpm
Housing	ø520
Water connection	G3/8"F
Nozzle connection	2x 1/8"NPT-F
Throughput medium	water (pH 3-12)

Indication:


- Read all instructions, check overall conditions and safety requirements before initial operation of the product.
- Our product should only be installed by experienced users of high pressure equipment.
- Safety regulations and guidelines (Accident Prevention Rules) from the manufacturer of your high pressure cleaner are applicable.
- Nozzle installation according to Nozzle manufacturer.
- Do not run the product if the rotor-arm is out of balance or bent, damage to the swivel will result.
- No modifications to the product are permitted.

Caution:

- Always use protection gear when using products connected to high pressure.
- Before any maintenance or nozzle-change, turn off the high pressure water supply, e.g.: turn off and secure the power switch.
- After turning off the system, allow all selfpropelled equipment to come to a complete stop before handling. Risk of injury due the rotor-arm.
- Do not lift up the product while operating.

Warning:

- Never direct any high pressure water-jet at humans, animals or electric installations.
- Do not touch the rotor-arm during operation. Risk of injury.
- Use correct pressure and nozzle angle according to roof surface. Operator must be secured according to roof working standards.

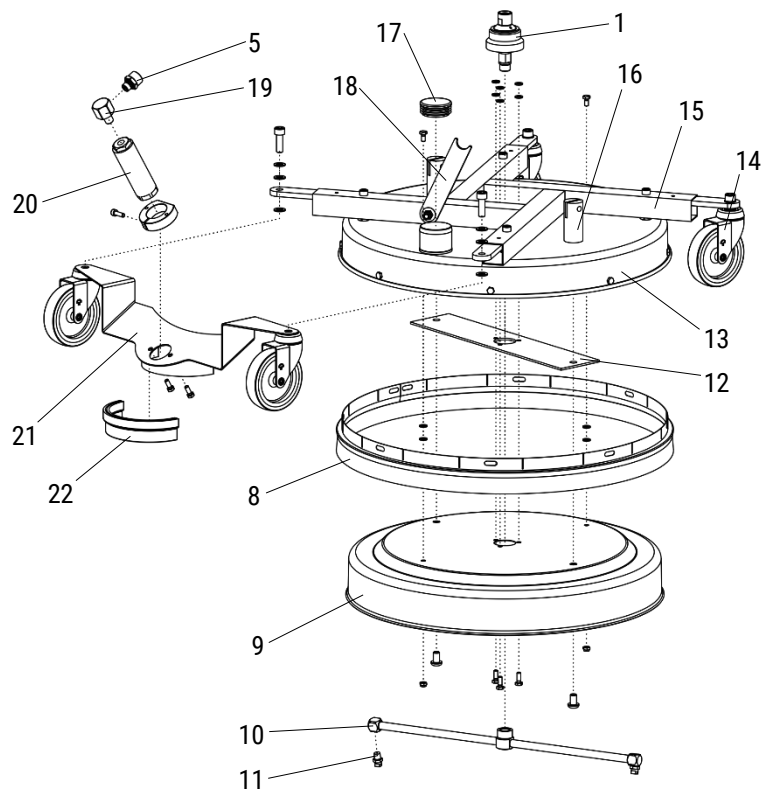

Ersatzteilliste / Spare parts list

Pos.	Art. Nr.	Bezeichnung	Description
1	55.253	Drehgelenk (DYCI)	Swivel (DYCI)
2	901.948	HD-Schlauch (R1/4"M / M22x1.5-F)	HP-hose (R1/4"M / M22x1.5-F)
3	905.161	Gabel kpl. ohne Schlauch + Pistole	Fork cpl. without hose + gun
4	50.160	Quick-Verschraubung (M22x1.5-F / G1/4"M)	Quick-Connect (M22x1.5-F / G1/4"M)
5	51.275	Verschraubung (M22x1.5-M / G1/4"M)	Adapter (M22x1.5-M / G1/4"M)
6	29.094	HD-Pistole (G3/8"F / G1/4"F)	HP-gun (G3/8"F / G1/4"F)
7	80.9003	HD-Schlauch mit Adaptern	HP-hose with adapters
8	80.9009	Bürstenring Ersatzset	Brush ring replacement-kit
9	901.781	Gehäuse innen	Cover
10	82.946	Rotorarm ø470	Rotor-arm ø470
11	18.15030	HD-Düse 1503	HP-nozzle 1503
12	900.958	Verstärkungsplatte	Reinforcement plate
13	904.927	Gehäuse mit Saugrohr	Cover with suction tube
14	80.956	Lenkrolle ø100 Ersatzset	Caster ø100 replacement-kit
15	80.9013	Radaufhängung ø520 Ersatzset	Wheel suspension ø520 replacement-kit
16	80.9002	Gabelhalter Ersatzset	Fork holder replacement-kit
17	902.046	Schutzstopfen	Plastic plug
18	902.647	Gabelstütze	Support
19	902.495	Verschraubung-90° (G1/4"F / R1/4"M)	Adapter-90° (G1/4"F / R1/4"M)
20	29.102	Poly-Düse 030 für Kaugummireiniger	Poly Nozzle 030 for Gum Remover
21	902.613	Halter für Kaugummidüse	Bracket for gum remover nozzle
22	905.789	Kantenschutz	Rim guard

